

# Type CAB & CABN Cleated Anchor Bracket


EMFLEX cleated anchor brackets are an assembly of plated steel formed angle cleats and steel clamps. To suit carbon steel (CAB Plain Clips), copper and stainless steel pipework (CABN Rubber Bonded Clips). They are to be used predominantly in conjunction with our axial bellows and twin clip slide guide sets.

15mm to 67/65mm minimum and maximum pipe centres are between 65mm & 95mm. We can also offer extended legs for pipe centres above 95mm.

(See below for typical installation).



Nominal Bore	Maximum Force	Clip Size	Nut & Bolt Size	Product Code
mm	N	Wth x Thk	Qty x mm	
15	450	25 x 3	6 x 25	15mm CABN
22	450	25 x 3	6 x 25	22mm CABN
28	450	25 x 3	6 x 25	28mm CABN
35	450	25 x 3	6 x 25	35mm CABN
42	1250	30 x 3	10 x 30	42mm CABN
54	1250	30 x 3	10 x 30	54mm CABN
67	1250	30 x 3	10 x 30	67mm CABN
15	900	25 x 3	6 x 25	15mm CAB
20	900	25 x 3	6 x 25	20mm CAB
25	900	25 x 3	6 x 25	25mm CAB
32	900	30 x 3	10 x 30	32mm CAB
40	2500	30 x 3	10 x 30	40mm CAB
50	2500	30 x 3	10 x 30	50mm CAB
65	2500	40 x 3	12 x 40	65mm CAB

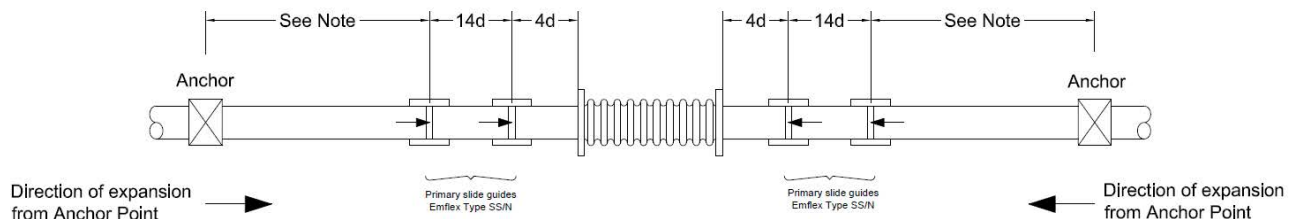

EMFLEX Type CAB & CABN can be used in conjunction with the following applications:

- Low Temperature Heating (LTHW) CAB & CABN
- Medium Temperature Heating (MTHW) CAB & CABN
- High Temperature Hot Water (HTHW) CAB & CABN
- Domestic Hot Water (DHWS) CABN Only